

**STR SERIES
AVR UPS 850VA-3000VA
LCD DISPLAY**




Main Features

- Rack-mounted UPS for Standard service cabinet
- Excellent microprocessor control optimizes reliability
- Built in super smart charger, shorten charging time
- Boost and buck AVR for voltage stabilization
- Auto restart while AC is recovering
- Off mode charging function
- Simulated Sinewave
- Cold start function
- Offering LED and LCD panels for selection
- Optional USB/RS-232 communication port and RJ-11 phone protection

Rear Panel

- AC input;
- 1U/2U/3U(selectable);
- Output Socket(selectable);
- TEL/Modem/Fax surge protection(RJ11/RJ45) (optional);
- USB/RS232 communication (optional);
- AC Fuse/Breaker (optional).

Back View:

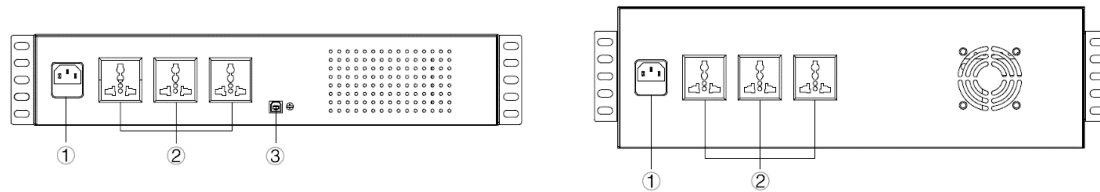

① Input ② Output ③ USB (optional)

Note: The output receptacles type may differ for different models.

Specifications

Model	STR850	STR1000	STR1200	STR1500	STR2000	STR3000
CAPACITY	850VA/ 480W	1000VA/ 600W	1200VA/ 720W	1500VA/ 900W	2000VA/ 1200W	3000VA/ 1800W
INPUT						
Voltage	230 VAC					
Voltage Range	140-300 VAC			170-280 VAC		
OUTPUT						
Voltage Regulation	+-10%					
Transfer Time	Typical 2-6ms, 10ms max.					
Waveform	Simulated Sine Wave					
BATTERY						
Type & Number	12V/9AH x1	12V/7AH x2	12V/7AH x2	12V/9AH x2	12V/9AH x2	12V/9AH x2
Charging Time	6 hours recover to 90% capacity					
PHYSICAL						
Dimension (DxWxH mm)	310*438*86				310*438*132	
Net Weight (kgs)	6	10	10	11	12	12.8
ENVIRONMENT						
Humidity	0-90 % RH @ 0-40°C (non-condensing)					
Noise Level	Less than 40 dB					

※ All Specifications are subject to change without notice.
Custom-made specifications are acceptable.

Applications:



**STR SERIES
AVR UPS 850VA-3000VA
LED DISPLAY**




Main Features

- Rack-mounted UPS for Standard service cabinet
- Excellent microprocessor control optimizes reliability
- Built in super smart charger, shorten charging time
- Boost and buck AVR for voltage stabilization
- Auto restart while AC is recovering
- Off mode charging function
- Simulated Sinewave
- Cold start function
- Offering LED and LCD panels for selection
- Optional USB/RS-232 communication port and RJ-11 phone protection

Rear Panel

- AC input;
- 1U/2U/3U(selectable);
- Output Socket(selectable);
- TEL/Modem/Fax surge protection(RJ11/RJ45) (optional);
- USB/RS232 communication (optional);
- AC Fuse/Breaker (optional).

Back View:

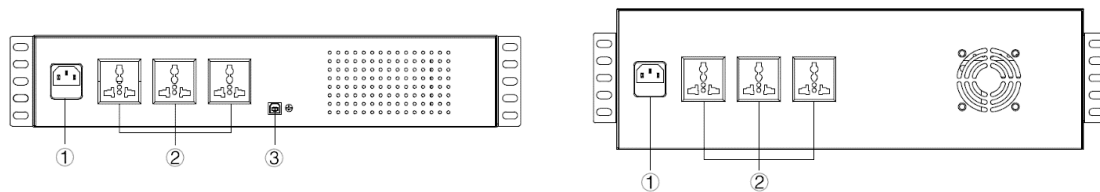

① Input ② Output ③ USB (optional)

Note: The output receptacles type may differ for different models.

Specifications

Model	STR850	STR1000	STR1200	STR1500	STR2000	STR3000
CAPACITY	850VA/ 480W	1000VA/ 600W	1200VA/ 720W	1500VA/ 900W	2000VA/ 1200W	3000VA/ 1800W
INPUT						
Voltage	230 VAC					
Voltage Range	140-300 VAC			170-280 VAC		
OUTPUT						
Voltage Regulation	+-10%					
Transfer Time	Typical 2-6ms, 10ms max.					
Waveform	Simulated Sine Wave					
BATTERY						
Type & Number	12V/9AH x1	12V/7AH x2	12V/7AH x2	12V/9AH x2	12V/9AH x2	12V/9AH x2
Charging Time	6 hours recover to 90% capacity					
PHYSICAL						
Dimension (DxWxH mm)	310*438*86			310*438*132		
Net Weight (kgs)	6	10	10	11	12	12.8
ENVIRONMENT						
Humidity	0-90 % RH @ 0-40°C (non-condensing)					
Noise Level	Less than 40 dB					

※ All Specifications are subject to change without notice.
Custom-made specifications are acceptable.

Applications:



STR SERIES
AVR UPS 850VA-3000VA
LEDA DISPLAY




Main Features

- Rack-mounted UPS for Standard service cabinet
- Excellent microprocessor control optimizes reliability
- Built in super smart charger, shorten charging time
- Boost and buck AVR for voltage stabilization
- Auto restart while AC is recovering
- Off mode charging function
- Simulated Sinewave
- Cold start function
- Offering LED and LCD panels for selection
- Optional USB/RS-232 communication port and RJ-11 phone protection

Rear Panel

- AC input;
- 1U/2U/3U(selectable);
- Output Socket(selectable);
- TEL/Modem/Fax surge protection(RJ11/RJ45) (optional);
- USB/RS232 communication (optional);
- AC Fuse/Breaker (optional).

Back View:

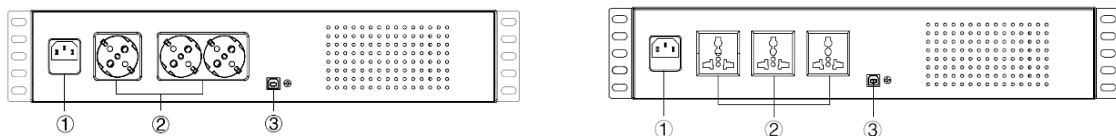

① Input ② Output ③ USB (optional)

Note: The output receptacles type may differ for different models.

Specifications

Model	STR850	STR1000	STR1200	STR1500	STR2000	STR3000
CAPACITY	850VA/ 480W	1000VA/ 600W	1200VA/ 720W	1500VA/ 900W	2000VA/ 1200W	3000VA/ 1800W
INPUT						
Voltage	230 VAC					
Voltage Range	140-300 VAC			170-280 VAC		
OUTPUT						
Voltage Regulation	+-10%					
Transfer Time	Typical 2-6ms, 10ms max.					
Waveform	Simulated Sine Wave					
BATTERY						
Type & Number	12V/9AH x1	12V/7AH x2	12V/7AH x2	12V/9AH x2	12V/9AH x2	12V/9AH x2
Charging Time	6 hours recover to 90% capacity					
PHYSICAL						
Dimension (DxWxH mm)	310*438*86			310*438*132		
Net Weight (kgs)	6	10	10	11	12	12.8
ENVIRONMENT						
Humidity	0-90 % RH @ 0-40°C (non-condensing)					
Noise Level	Less than 40 dB					

※ All Specifications are subject to change without notice.
Custom-made specifications are acceptable.

Applications:



**STR SERIES
AVR UPS 850VA-3000VA
LEM DISPLAY**




Main Features

- Rack-mounted UPS for Standard service cabinet
- Excellent microprocessor control optimizes reliability
- Built in super smart charger, shorten charging time
- Boost and buck AVR for voltage stabilization
- Auto restart while AC is recovering
- Off mode charging function
- Simulated Sinewave
- Cold start function
- Offering LED and LCD panels for selection
- Optional USB/RS-232 communication port and RJ-11 phone protection

Rear Panel

- AC input;
- 1U/2U/3U(selectable);
- Output Socket(selectable);
- TEL/Modem/Fax surge protection(RJ11/RJ45) (optional);
- USB/RS232 communication (optional);
- AC Fuse/Breaker (optional).

Back View:

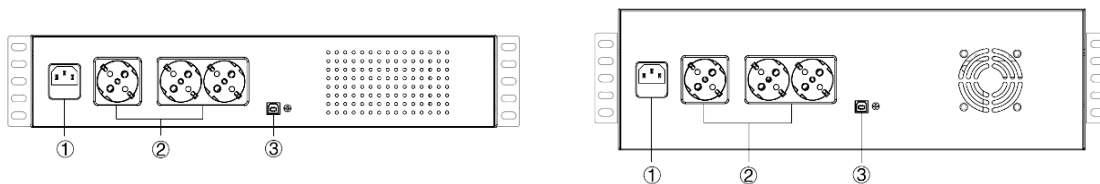

① Input ② Output ③ USB (optional)

Note: The output receptacles type may differ for different models.

Specifications

Model	STR850	STR1000	STR1200	STR1500	STR2000	STR3000
CAPACITY	850VA/ 480W	1000VA/ 600W	1200VA/ 720W	1500VA/ 900W	2000VA/ 1200W	3000VA/ 1800W
INPUT						
Voltage	230 VAC					
Voltage Range	140-300 VAC			170-280 VAC		
OUTPUT						
Voltage Regulation	+-10%					
Transfer Time	Typical 2-6ms, 10ms max.					
Waveform	Simulated Sine Wave					
BATTERY						
Type & Number	12V/9AH x1	12V/7AH x2	12V/7AH x2	12V/9AH x2	12V/9AH x2	12V/9AH x2
Charging Time	6 hours recover to 90% capacity					
PHYSICAL						
Dimension (DxWxH mm)	310*438*86			310*438*132		
Net Weight (kgs)	6	10	10	11	12	12.8
ENVIRONMENT						
Humidity	0-90 % RH @ 0-40°C (non-condensing)					
Noise Level	Less than 40 dB					

※ All Specifications are subject to change without notice.
Custom-made specifications are acceptable.

Applications:

